

MPD-4CC HV

ETL405MA02C4A01

MANUALE UTENTE V. 1.5



INDICE

SPECIFICHE TECNICHE	2
ALIMENTAZIONE DEL DISPOSITIVO E CONNESSIONE AL MODULO LED	2
MODALITÀ 0: INGRESSO SLAVE DMX-512/RDM 4 CANALI (DEFAULT)	3
MODALITÀ 1: INGRESSO SLAVE DMX-512/RDM 4 CANALI CON POSSIBILITA' DI SETTAGGIO PARAMETRI	3
MODALITÀ 2: INGRESSO SLAVE DMX-512/RDM MONOCANALE	3
MODALITÀ 3: INGRESSO SLAVE DMX-512/RDM MONOCANALE CON POSSIBILITA' DI SETTAGGIO DI PARAMETRI	4
MODALITÀ 4: INGRESSO DALI 4 CANALI	4
MODALITÀ 5: INGRESSO DALI MONOCANALE	5
MODALITÀ 6: INGRESSO PUSH (NON ISOLATO) 4 CANALI INDIPENDENTI	5
MODALITÀ 7: INGRESSO PUSH (ISOLATO) MONOCANALE + BLUETOOTH	6
MODALITÀ 8: INGRESSO POTENZIOMETRO (100KΩ) 4 CANALI INDIPENDENTI	6
MODALITÀ 8: INGRESSO 0-10V, 1-10V 4 CANALI INDIPENDENTI	7
MODALITÀ 9: GENERATORE SHOW STANDALONE CON CONTROLLO TRASMISSIONE SU BUS DMX-512/RDM	8
GUIDA INSTALLAZIONE APP ANDROID	9
GUIDA INSTALLAZIONE iOS	9
CONFIGURAZIONI SPECIALI	10

► **ETL405MA02C4A01** è un dimmer 4 canali con uscita in corrente PWM e range di alimentazione da 8 a 53 VDC. Le uscite sono impostabili con corrente da 0.17A a 1.05A (54.6W a 52V DC). I canali di uscita sono collegabili in parallelo per incremento di potenza ed è controllabile tramite app Android/iOS Newlab Go con differenti modalità: Monocanale, RGB, RGB + White, Bianco dinamico.

ETL405MA02C4A01 permette il dimming di moduli led attraverso le seguenti modalità di controllo:

- INGRESSO SLAVE DMX-512/RDM 4 CANALI (Modalità 0 DEFAULT)
- INGRESSO SLAVE DMX-512/RDM 4 CANALI CON POSSIBILITA' DI SETTAGGIO PARAMETRI (Modalità 1)
- INGRESSO SLAVE DMX-512/RDM MONOCANALE (Modalità 2)
- INGRESSO SLAVE DMX-512/RDM MONOCANALE CON POSSIBILITA' DI SETTAGGIO PARAMETRI (Modalità 3)
- INGRESSO DALI 4 CANALI (Modalità 4)
- INGRESSO DALI MONOCANALE (Modalità 5)
- INGRESSO PUSH (NON ISOLATO) 4 CANALI INDIPENDENTI (Modalità 6)
- INGRESSO PUSH (ISOLATO) MONOCANALE + BLUETOOTH (Modalità 7)
- INGRESSO POTENZIOMETRO (100KΩ), 0-10V, 1-10V 4 CANALI INDIPENDENTI (Modalità 8)
- GENERATORE SHOW STANDALONE CON CONTROLLO TRASMISSIONE SU BUS DMX-512 (Modalità 9)

NOTA IMPORTANTE:

Per modificare la modalità di funzionamento è necessario utilizzare l'interfaccia ETL392MA00N0A1, dispositivo di programmazione dei parametri di funzionamento per i dimmer della famiglia ETL4xx.. (ETL400.., ETL412.., ETL405.., ETL406..).

Per i dettagli circa l'utilizzo dell'interfaccia ETL392MA00N0A1 consultare il manuale dedicato.

► DATI TECNICI

	Valore
Tensione di alimentazione	8 ~ 53 VDC
Tensione di uscita	8 ~ 52 VDC
Numero di canali	4
Corrente di uscita massima (ETL405MA02C04A01)	1050mA per canale
Corrente assorbita in assenza di carico 48VDC (ETL405MA02C04A01)	35 mA
Potenza nominale massima uscita 12VDC* (ETL405MA02C04A01)	12.6 W
Potenza nominale massima uscita 24VDC* (ETL405MA02C04A01)	25.2 W
Potenza nominale massima uscita 48VDC* (ETL405MA02C04A01)	50.4 W
Frequenza dimmer PWM	390 Hz
Intervento termico	150 °C su micro-controller
Temperatura di stoccaggio	-40 °C ~ +60 °C
Temperatura di esercizio	-20 °C ~ +50 °C
Classe di protezione	IP20
Peso	98 g
Dimensioni meccaniche	90 x 70 x 58 mm
Protezioni	Inversione di polarità Protezione da circuito aperto Protezione da picchi di tensione Corto circuito Protezione termica

* NOTA: a Temperatura ambiente 25°C per temperature ambiente maggiori richiedere la curva di derating.

► ALIMENTAZIONE DEL DISPOSITIVO E CONNESSIONE AL MODULO LED




(FIG. 1)

Il dimmer **ETL405MA02C4A01** deve essere alimentato secondo la polarità indicata in FIG. 1 attraverso i morsetti DC IN (+ e -). Nel caso in cui la polarità di alimentazione venga invertita il dispositivo non subisce nessun danno.

La connessione del carico LED su **ETL405MA02C4A01** (uscita corrente costante anodo comune) deve essere effettuata utilizzando i morsetti: CH1+, CH1- ; CH2+, CH2- ; CH3+, CH3- e CH4+, CH4- (come in FIG.1).

Nella modalità monocanale o nei casi in cui i carichi richiedano correnti maggiori di 1050mA è possibile collegare in parallelo le uscite. La corrente risulterà essere la somma delle correnti erogate dai canali connessi in parallelo .

► MODALITÀ 0: INGRESSO SLAVE DMX-512/RDM 4 CANALI (DEFAULT)

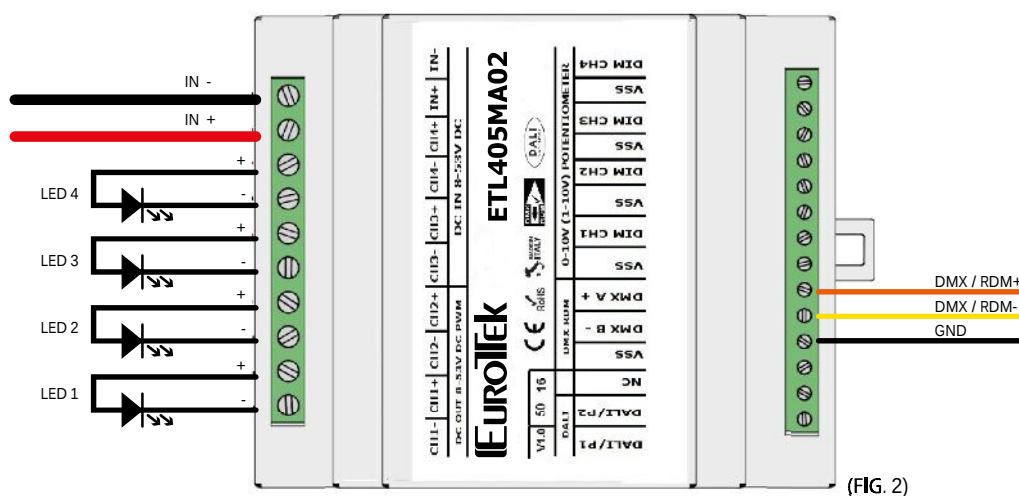

(FIG. 2)

In questa modalità (DEFAULT) dimmer **ETL405MA02C4A01** può essere controllato mediante un bus DMX-512/RDM.

I morsetti per il collegamento al bus sono VSS, DMX A e DMX B.

Il dispositivo occupa 4 canali DMX-512/RDM, a partire dall'indirizzo di base (DEFAULT 1), che può essere impostato mediante protocollo RDM oppure mediante il programmatore (ETL392MA00N0A1).

Fare riferimento al manuale del programmatore per le modalità.

In questa modalità il dispositivo lavora in curva lineare e la funzionalità FADE è disabilitata.

ATTENZIONE: PER IL CORRETTO FUNZIONAMENTO DEL BUS DMX È NECESSARIO COLLEGARE TRA LORO I POLI GND DEI DISPOSITIVI CONNESSI AL BUS. UTILIZZARE IL MORSETTO VSS COME IN FIGURA (FIG.2).

► MODALITÀ 1: INGRESSO SLAVE DMX-512/RDM 4 CANALI CON POSSIBILITÀ DI SETTAGGIO PARAMETRI

In questa modalità il dimmer **ETL405MA02C4A01** può essere controllato mediante un bus DMX-512/RDM. Il dispositivo occupa 4 canali DMX-512/RDM, a partire dall'indirizzo di base. La figura di riferimento per i collegamenti è FIG.2.

L'indirizzo DMX di base (DEFAULT 1) può essere impostato mediante protocollo RDM oppure mediante il programmatore (opzionale) ETL392MA00N0A1.

Fare riferimento al manuale del programmatore per le modalità.

In questa modalità è inoltre possibile selezionare la curva di risposta del dispositivo come LOG (logaritmica) o LIN (lineare) ed abilitare o disabilitare il FADE HW.

ATTENZIONE: PER IL CORRETTO FUNZIONAMENTO DEL BUS DMX È NECESSARIO COLLEGARE TRA LORO I POLI GND DEI DISPOSITIVI CONNESSI AL BUS. UTILIZZARE IL MORSETTO VSS COME IN FIGURA (FIG.2).

IN QUESTA MODALITÀ IL CONTROLLO BLE (Bluetooth Low Energy) È INIBITO.

► MODALITÀ 2: INGRESSO SLAVE DMX-512/RDM MONOCANALE

In questa modalità dimmer **ETL405MA02C4A01** può essere controllato mediante un bus DMX-512/RDM con funzionalità monocanale. Il dispositivo occupa 1 canale DMX-512/RDM. La figura di riferimento per i collegamenti è FIG.2.

ETL405MA02C4A01 in questa modalità è in grado di gestire fino a 4200mA complessivi. L'indirizzo DMX di base (DEFAULT 1) può essere impostato mediante protocollo RDM oppure mediante il programmatore (opzionale) ETL392MA00N0A1. Fare riferimento al manuale del programmatore per le modalità.

In questa modalità il dispositivo lavora in curva lineare e la funzionalità FADE è disabilitata.

ATTENZIONE: PER IL CORRETTO FUNZIONAMENTO DEL BUS DMX È NECESSARIO COLLEGARE TRA LORO I POLI GND DEI DISPOSITIVI CONNESSI AL BUS. UTILIZZARE IL MORSETTO VSS COME IN FIGURA (FIG.2).

IN QUESTA MODALITÀ IL CONTROLLO BLE (Bluetooth Low Energy) È INIBITO.

► MODALITÀ 3: INGRESSO SLAVE DMX-512/RDM MONOCANALE CON POSSIBILITÀ DI SETTAGGIO PARAMETRI

In questa modalità dimmer **ETL405MA02C4A01** può essere controllato mediante un bus DMX-512/RDM con funzionalità monocanale. Il dispositivo occupa 1 canale DMX-512/RDM. La figura di riferimento per i collegamenti è FIG.2 (pag.3).

ETL405MA02C4A01 in questa modalità è in grado di gestire fino a 4200mA complessivi. L'indirizzo DMX di base (DEFAULT 1) può essere impostato mediante protocollo RDM oppure mediante il programmatore (opzionale) ETL392MA00NOA1. Fare riferimento al manuale del programmatore per le modalità.


In questa modalità è inoltre possibile selezionare la curva di risposta del dispositivo come LOG (logaritmica) o LIN (lineare) ed abilitare o disabilitare il FADE HW.

ATTENZIONE: PER IL CORRETTO FUNZIONAMENTO DEL BUS DMX È NECESSARIO COLLEGARE TRA LORO I POLI GND DEI DISPOSITIVI CONNESSI AL BUS.

UTILIZZARE IL MORSETTO VSS COME IN FIGURA (FIG.2).

IN QUESTA MODALITÀ IL CONTROLLO BLE (Bluetooth Low Energy) È INIBITO.

► MODALITÀ 4: INGRESSO DALI 4 CANALI

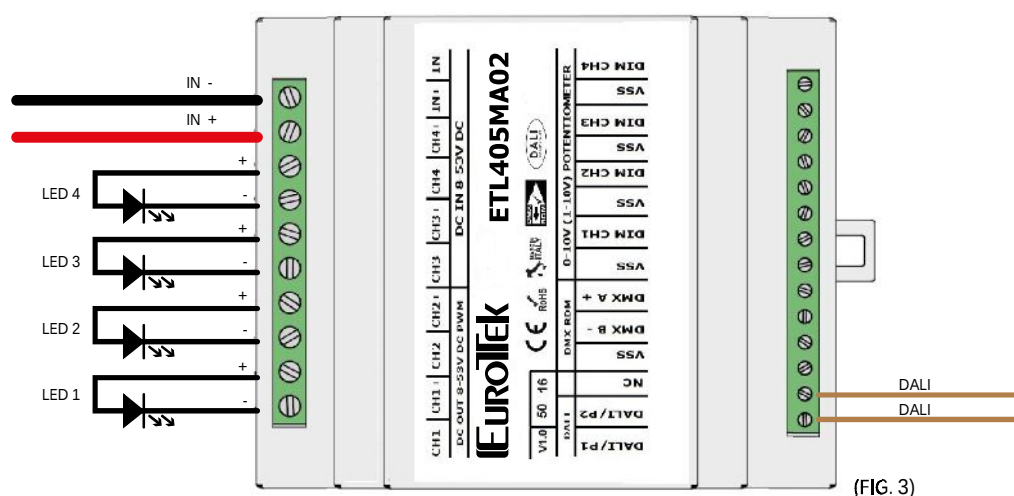

(FIG. 3)

In questa modalità **ETL405MA02C4A01** agisce come dimmer DALI 4 canali. **ETL405MA02C4A01** viene riconosciuto durante l'indirizzamento come 4 dispositivi DALI completamente indipendenti. La figura di riferimento per i collegamenti è FIG.3.

La corrente massima assorbita dal dispositivo verso il bus DALI è di circa 2mA.

In questa modalità, i parametri ricevuti dal bus DALI vengono inviati anche sul bus DMX512/RDM sul canale impostato:

- 1° DEVICE DALI → DMX512 ADDRESS 1
- 2° DEVICE DALI → DMX512 ADDRESS 2
- 3° DEVICE DALI → DMX512 ADDRESS 3
- 4° DEVICE DALI → DMX512 ADDRESS 4

Qui di seguito i comandi standard implementati:

- | | | | |
|----------------------|---|--------------------------------|------------------------------|
| ► DIRECT ARC POWER | ► STORE ACTUAL LEVEL IN THE DTR | ► QUERY STATUS | ► QUERY ACTUAL LEVEL |
| ► OFF | ► STORE THE DTR AS MAX LEVEL | ► QUERY BALLAST | ► QUERY MAX LEVEL |
| ► UP | ► STORE THE DTR AS MIN LEVEL | ► QUERY LAMP POWER ON | ► QUERY MIN LEVEL |
| ► DOWN | ► STORE THE DTR AS SYSTEM FAILURE LEVEL | ► QUERY LIMIT ERROR | ► QUERY POWER ON LEVEL |
| ► STEP UP | ► STORE THE DTR AS POWER ON LEVEL | ► QUERY RESET STATE | ► QUERY SYSTEM FAILURE LEVEL |
| ► STEP DOWN | ► STORE THE DTR AS FADE TIME | ► QUERY MISSING SHORT ADDRESS | ► QUERY FADE TIME/FADE RATE |
| ► RECALL MAX LEVEL | ► STORE THE DTR AS FADE RATE | ► QUERY VERSION NUMBER | ► QUERY SCENE LEVEL (0-15) |
| ► RECALL MIN LEVEL | ► STORE THE DTR AS SCENE (0-15) | ► QUERY DEVICE TYPE | ► QUERY GROUPS (0-7) |
| ► STEP DOWN AND OFF | ► REMOVE FROM SCENE (0-15) | ► QUERY PHYSICAL MINIMUM LEVEL | ► QUERY GROUPS (8-15) |
| ► ON AND STEP UP | ► ADD TO GROUP (0-15) | ► QUERY POWER FAILURE | ► QUERY RANDOM ADDRESS H |
| ► GO TO SCENE (0-15) | ► REMOVE FROM GROUP (0-15) | ► QUERY CONTENT DTR1 | ► QUERY RANDOM ADDRESS M |
| ► RESET | ► STORE DTR AS SHORT ADDRESS | ► QUERY CONTENT DTR2 | ► QUERY RANDOM ADDRESS L |

► MODALITÀ 5: INGRESSO DALI MONOCANALE


In questa modalità **ETL405MA02C4A01** agisce come dimmer DALI monocanale. La figura di riferimento per i collegamenti è FIG.3 .

La corrente massima assorbita dal dispositivo verso il bus DALI è di circa 2mA.

In questa modalità, i parametri ricevuti dal bus DALI vengono inviati anche sul bus DMX512/RDM sul canale 1-2-3-4.

I comandi standard implementati sono quelli elencati a pagina 4 sotto la sezione "MODALITÀ 4".

► MODALITÀ 6: INGRESSO PUSH (NON ISOLATO) 4 CANALI INDIPENDENTI + BLE

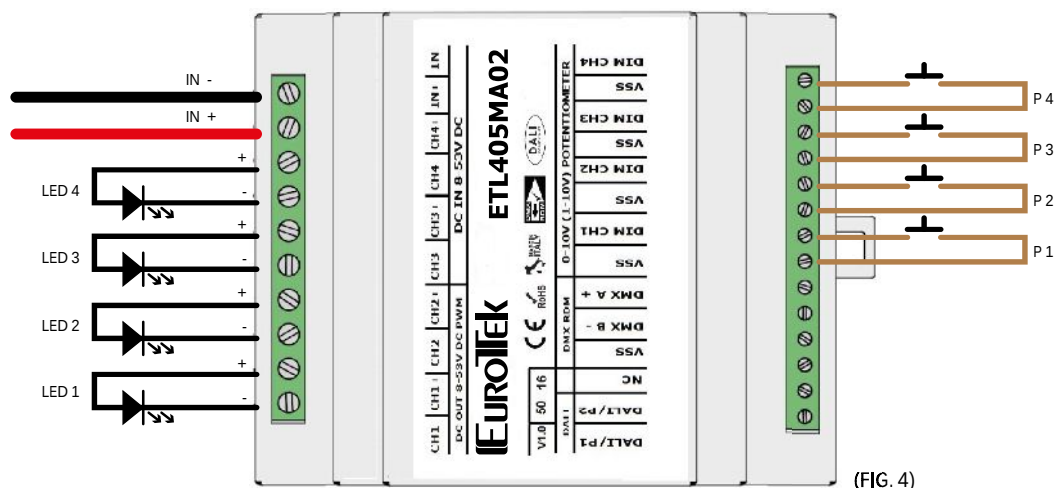

(FIG. 4)

COLLEGAMENTO PULSANTI

In questa modalità è possibile controllare i 4 canali di uscita di **ETL405MA02C4A01** mediante la pressione di 4 tasti NO connessi come in figura 4.

Funzionamento interfaccia PUSH

► Singolo Click (pressione rapida (<1sec))	Accende o spegne l'output (ON/OFF).
► Doppio Click (pressione rapida (<1sec))	Imposta massima luminosità (output= 100%)
► Long Press (pressione prolungata (>1sec))	Se il dimmer è in stato di OFF, imposta l'output al valore di minimo (default= 1%) Se il dimmer è in stato di ON, la pressione prolungata permette il dimming dell'output salita/discesa).

In questa modalità, i parametri impostati mediante i pulsanti vengono inviati anche sul bus DMX512/RDM sul canale:

1° PULSANTE – CH1 → DMX512 ADDRESS 1


2° PULSANTE – CH2 → DMX512 ADDRESS 2

3° PULSANTE – CH3 → DMX512 ADDRESS 3

4° PULSANTE – CH4 → DMX512 ADDRESS 4

L'indirizzo DMX di base (DEFAULT 1) può essere impostato mediante protocollo RDM oppure mediante il programmatore (opzionale) ETL392MA00N0A1.

► MODALITÀ 7: INGRESSO PUSH ISOLATO MONOCANALE + BLUETOOTH

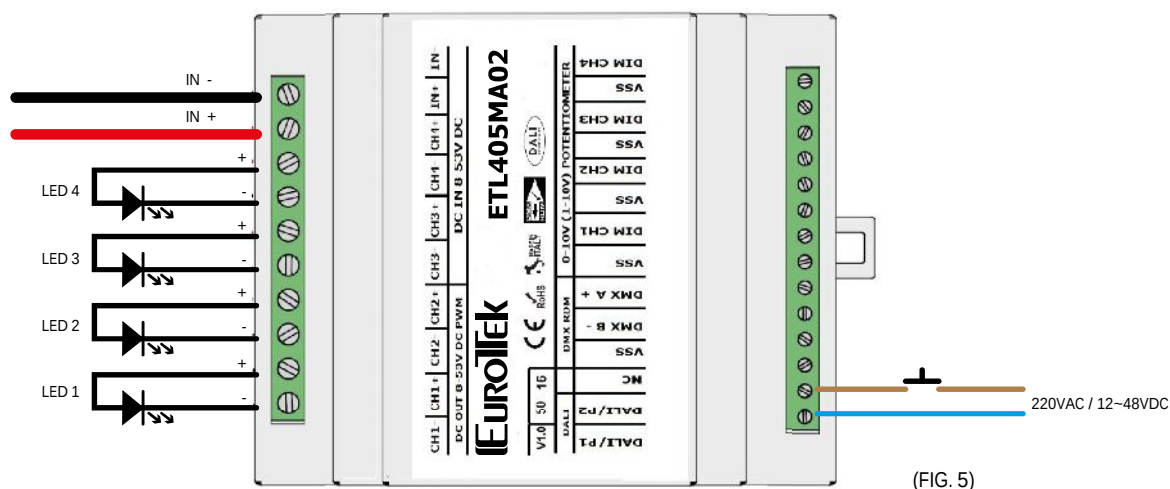

(FIG. 5)

COLLEGAMENTO PULSANTE ISOLATO

In questa modalità è possibile controllare i 4 canali di uscita di **ETL405MA02C4A01** in **maniera sincrona**, mediante la pressione di 1 tasto NO connesso come in fig. 5.

ETL405MA02C4A01 in questa modalità è in grado di gestire fino a 4200mA complessivi ed è anche possibile, controllare il dispositivo mediante smartphone attraverso l'APP Newlab GO. Riferirsi alle appendici per dettagli sull'installazione ed uso dell'app.

Funzionamento interfaccia PUSH	
► Singolo Click (pressione rapida (<1sec))	Accende o spegne l'output (ON/OFF).
► Doppio Click (pressione rapida (<1sec))	Imposta massima luminosità (output = 100%)
► Long Press (pressione prolungata (>1sec))	Se il dimmer è in stato di OFF, imposta l'output al valore di minimo (default= 1%) Se il dimmer è in stato di ON, la pressione prolungata permette il dimming dell'output salita/discesa).

In questa modalità, i parametri impostati mediante i pulsanti vengono inviati anche sul bus DMX512/RDM sul canale:

1° PULSANTE – CH1 → DMX512 ADDRESS 1


2° PULSANTE – CH2 → DMX512 ADDRESS 2

3° PULSANTE – CH3 → DMX512 ADDRESS 3

4° PULSANTE – CH4 → DMX512 ADDRESS 4

L'indirizzo DMX di base (DEFAULT 1) può essere impostato mediante protocollo RDM oppure mediante il programmatore (opzionale) ETL392MA00N0A1.

► MODALITÀ 8: INGRESSO POTENZIOMETRO (100kΩ), 4 CANALI INDIPENDENTI

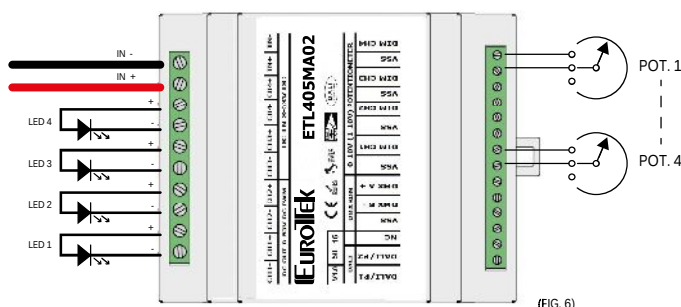


(FIG. 6)

COLLEGAMENTO POTENZIOMETRO PER ETL405MA02C4A01

- Canale 1 Morsetti **DIM CH1** e **VSS**.
- Canale 2 Morsetti **DIM CH2** e **VSS**.
- Canale 3 Morsetti **DIM CH3** e **VSS**.
- Canale 4 Morsetti **DIM CH4** e **VSS**.

► MODALITÀ 8: INGRESSO 0~10V/1~10V, 4 CANALI INDIPENDENTI

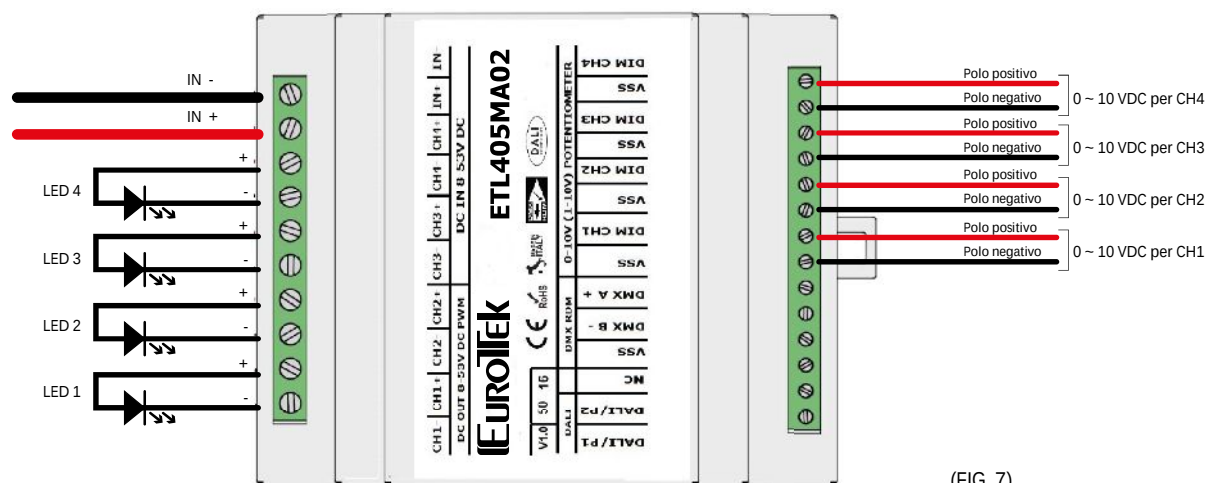

(FIG. 7)

COLLEGAMENTO 0 ~ 10V / 1 ~ 10V

Questa modalità consente il controllo del dimmer **ETL405MA02C4A01** con segnali analogici. In base al cablaggio effettuato (FIG.7) è possibile utilizzare un segnale 0~10V oppure 1~10V (il cablaggio è lo stesso utilizzato per il controllo da potenziometro con valore 100KΩ).

Ogni canale di ingresso analogico controlla la luminosità del canale di uscita corrispondente.

La corrente massima assorbita dal dimmer dall'interfaccia 0~10V / 1~10V è di 0,1mA.

Di default la curva di dimming segue un andamento logaritmico* proporzionale alla tensione di controllo.

Un valore di tensione inferiore ad 1V viene interpretato come carico spento.


* NOTA: Tale impostazione è configurabile tramite l'interfaccia codice ETL392MA00N0A1.

Morsetti per connessione segnali analogici di pilotaggio:

- Canale analogico di ingresso N°1: Morsetti VSS (0V) e DIM CH1 (+V)
- Canale analogico di ingresso N°2: Morsetti VSS (0V) e DIM CH2 (+V)
- Canale analogico di ingresso N°3: Morsetti VSS (0V) e DIM CH3 (+V)
- Canale analogico di ingresso N°4: Morsetti VSS (0V) e DIM CH4 (+V)


► COLLEGAMENTI MONO-CANALE PER INGRESSO 0~10V/1~10V E POTENZIOMETRO

COLLEGAMENTO MONO-CANALE POTENZIOMETRO 100K

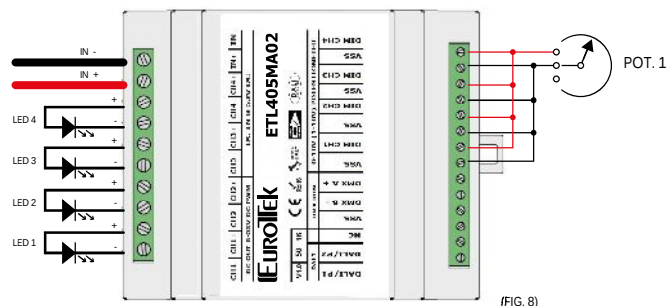


(FIG. 8)

COLLEGAMENTO MONO-CANALE 0 ~ 10V / 1 ~ 10V

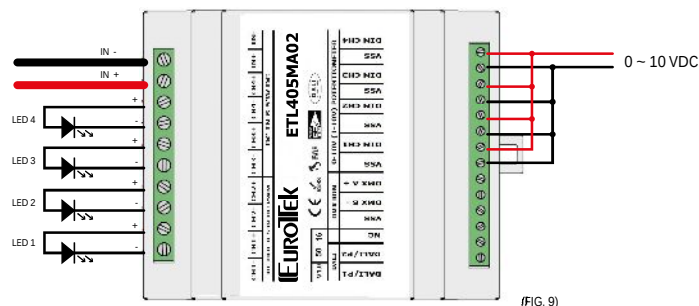

(FIG. 9)

► MODALITÀ 9: GENERATORE SHOW STANDALONE CON CONTROLLO TRASMISSIONE SU BUS DMX-512/RDM

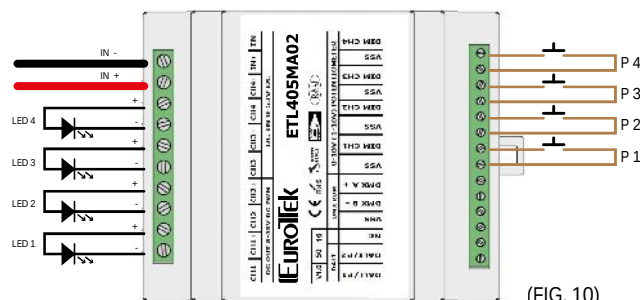

(FIG. 10)

In questa modalità il dimmer **ETL405MA02C4A01** agisce come generatore di show preprogrammati DMX, con input su 4 tasti Normalmente Aperti connessi, come in figura 4. **IN QUESTA MODALITÀ IL CONTROLLO BLE (Bluetooth Low Energy) È INIBITO.**

Ad ogni pressione del tasto corrisponde una variazione nel programma in esecuzione, come da tabella seguente.

Pulsante P1	Pulsante P2	Pulsante P3	Pulsante P4
<i>Shows e dissolvenze</i>	<i>Colori fissi (% canali R - G -</i>	<i>Spegnimento e accensione</i>	<i>Spegnimento e accensione</i>
		<i>CH4 (Bianco)</i>	
1 Arcobaleno Lento	1 Blocco Show e memorizzazione colore	1 Pressione rapida: Spegnimento	1 Pressione rapida: Spegnimento
2 Arcobaleno Medio	1 BIANCO (66%--100%--78%)		
3 Arcobaleno Veloce	2 BIANCO CALDO (100%--83%--5%)	2 Pressione rapida: Accensione	2 Pressione rapida: Accensione con memoria dell'ultimo spegnimento
4 Dissolvenza Lenta	3 BIANCO FREDDO (54%--100%--100%)		
5 Dissolvenza Media	4 ROSSO (100%--00%--00%)		
6 Dissolvenza Veloce	5 ARANCIO (100%--15%--00%)	3: Pressione lenta variazione intensità luminosa (2% - 100%)	3: Pressione lenta variazione intensità luminosa (2% - 100%)
7 Dissolvenza Fredda Lenta	6 MANDARINO (100%--15%--00%)		
	7 MELONE (100%--47%--00%)		
8 Dissolvenza Fredda Media	8 LIMONE (100%--100%--00%)		
	9 LIME (70%--100%--00%)		
9 Dissolvenza Fredda Veloce	10 VERDE ACIDO (47%--100%--00%)		
	11 MELA VERDE (29%--100%--00%)		
10 Dissolvenza Calda Lenta	12 VERDE FLUO (11%--100%--00%)		
	13 VERDE (00%--100%--00%)		
11 Dissolvenza Calda Media	14 VERDE ACQUA (00%--100%--10%)		
	15 CARAIBI (00%--100%--20%)		
12 Dissolvenza Calda Veloce	16 CIELO TERSO (00%--100%--45%)		
	17 AZZURRO (00%--100%--100%)		
13 Dissolvenza Rossa Lenta	18 BLU MANGANESE (00%--43%--100%)		
	19 BLU (00%--00%--100%)		
14 Dissolvenza Rossa Media	20 IRIS (10%--00%--100%)		
	21 LAVANDA (17%--00%--100%)		
15 Dissolvenza Rossa Veloce	22 VIOLETTO (37%--00%--100%)		
	23 ROSA FLUO (65%--00%--100%)		
	24 ROSA TENUE (100%--47%--16%)		
	25 ROSA (100%--00%--100%)		
	26 ROSA SHOCKING (100%--00%--75%)		
	27 ROSA ACCESO (100%--00%--47%)		
	28 VIOLA (100%--00%--100%)		
	29 PORPORA (100%--00%--4%)		

► GUIDA INSTALLAZIONE APP ANDROID

ANDROID	iOS
Su terminale Android collegarsi al Play Store, 	Su terminale iOS collegarsi al App Store, 
digitare nel pannello di ricerca "Newlab Light" selezionare l'APP con la seguente icona,  Newlab Light	digitare nel pannello di ricerca "Newlab Light" selezionare l'APP con la seguente icona,  Newlab Light
In alternativa è possibile utilizzare il seguente QR CODE 	
Premere il tasto installa. Al termine dell'installazione l'app verrà visualizzata all'interno del menu APP presente sul dispositivo smartphone/tablet. Premere l'icona Newlab Light per avviare l'APP. 	Al termine dell'installazione l'app verrà visualizzata all'interno del menu APP presente sul dispositivo smartphone/tablet. Premere l'icona Newlab Light per avviare l'APP. 

► CONFIGURAZIONE PARAMETRI

Reset														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Reset	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON

Curva Dimming														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Logaritmica	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Lineare	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON

Fade														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Fade Off	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Fade On	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON

Cambio Modalità														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Ingresso Slave DMX-512/RDM 4 Canali	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Ingresso Slave DMX-512/RDM 4 Canali con possibilità di settaggio parametri	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
Ingresso Slave DMX-512/RDM monocanale	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Ingresso Slave DMX-512/RDM monocanale con possibilità di settaggio parametri	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON
Ingresso DALI 4 Canali	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Ingresso DALI monocanale	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON
Ingresso PUSH (NON ISOLATO) 4 canali indipendenti + Bluetooth	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Ingresso PUSH (ISOLATO) monocanale + Bluetooth	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON
Ingresso Potenziometro (100KOhm), 0-10V, 1-10V 4 canali indipendenti	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Generatore Show Standalone con controllo trasmissione su bus DMX-512	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON

Corrente														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
170 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
182 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
195 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
210 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON
222 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
235 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON
250 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
260 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON
270 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
290 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON
300 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
315 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON

330 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
345 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON
355 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
370 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON
385 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
395 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON
410 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
425 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	ON
438 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
450 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	ON
465 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
480 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	ON
490 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
500 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	ON
515 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
530 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	ON
545 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
560 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	ON
575 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF
585 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON
600 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
615 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON
626 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
640 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	ON
653 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
667 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	ON
680 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
694 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	ON
707 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
721 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	ON
734 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
748 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	ON
761 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
775 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	ON
788 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF
802 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	ON	ON
815 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
829 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	ON
840 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
855 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	ON
870 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
880 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	ON
895 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF
910 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	ON	ON
920 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
935 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	ON
950 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF
965 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	ON	ON
975 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF
990 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF	ON
1020 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF

1050 mA	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON
---------	-----	----	-----	-----	-----	-----	-----	-----	-----	----	----	----	----	----	----

Indirizzo DMX															
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10	
Indirizzo 1	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 2	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 3	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 4	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 5	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 6	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 7	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 8	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 9	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 10	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 11	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 12	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 13	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 14	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 15	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	
Indirizzo 16	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 17	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 18	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 19	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 20	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 21	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 22	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 23	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 24	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 25	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 26	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 27	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 28	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 29	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 30	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 31	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	
Indirizzo 32	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 33	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 34	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 35	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 36	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 37	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 38	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 39	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 40	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 41	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 42	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 43	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 44	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 45	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 46	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	
Indirizzo 47	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	

Indirizzo 48	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 49	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 50	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 51	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 52	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 53	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 54	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 55	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 56	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 57	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 58	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 59	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 60	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 61	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 62	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 63	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 64	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 65	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 66	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 67	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 68	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 69	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 70	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 71	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 72	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 73	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 74	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 75	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 76	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 77	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 78	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 79	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 80	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 81	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 82	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 83	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 84	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 85	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 86	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 87	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 88	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 89	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 90	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 91	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 92	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 93	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 94	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 95	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 96	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 97	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 98	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF

Indirizzo 99	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 100	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 101	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 102	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 103	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 104	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 105	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 106	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 107	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 108	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 109	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 110	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 111	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 112	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 113	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 114	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 115	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 116	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 117	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 118	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 119	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 120	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 121	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 122	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 123	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 124	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 125	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 126	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 127	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 128	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 129	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 130	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 131	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 132	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 133	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 134	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 135	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 136	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 137	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 138	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 139	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 140	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 141	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 142	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 143	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 144	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 145	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 146	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 147	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 148	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 149	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF

Indirizzo 150	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 151	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 152	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 153	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 154	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 155	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 156	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 157	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 158	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 159	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 160	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 161	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 162	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 163	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 164	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 165	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 166	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 167	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 168	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 169	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 170	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 171	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 172	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 173	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 174	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 175	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 176	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 177	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 178	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 179	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 180	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 181	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 182	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 183	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 184	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 185	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 186	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 187	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 188	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 189	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 190	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 191	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 192	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 193	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 194	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 195	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 196	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 197	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 198	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 199	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 200	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF

Indirizzo 201	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 202	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 203	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 204	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 205	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 206	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 207	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 208	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 209	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 210	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 211	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 212	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 213	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 214	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 215	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 216	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 217	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 218	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 219	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 220	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 221	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 222	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 223	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 224	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 225	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 226	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 227	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 228	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 229	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 230	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 231	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 232	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 233	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 234	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 235	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 236	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 237	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 238	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 239	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 240	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 241	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 242	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 243	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 244	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 245	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 246	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 247	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 248	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 249	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 250	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 251	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF

Indirizzo 252	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 253	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 254	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 255	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 256	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 257	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 258	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 259	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 260	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 261	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 262	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 263	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 264	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 265	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 266	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 267	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 268	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 269	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 270	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 271	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 272	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 273	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 274	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 275	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 276	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 277	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 278	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 279	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 280	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 281	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 282	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 283	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 284	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 285	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 286	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 287	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 288	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 289	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 290	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 291	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 292	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 293	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 294	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 295	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 296	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 297	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 298	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 299	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 300	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 301	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 302	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF

Indirizzo 303	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 304	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 305	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 306	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 307	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 308	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 309	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 310	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 311	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 312	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 313	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 314	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 315	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 316	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 317	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 318	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 319	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 320	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 321	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 322	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 323	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 324	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 325	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 326	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 327	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 328	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 329	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 330	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 331	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 332	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 333	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 334	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 335	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 336	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 337	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 338	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 339	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 340	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 341	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 342	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 343	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 344	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 345	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 346	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 347	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 348	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 349	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 350	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 351	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 352	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 353	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF

Indirizzo 354	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 355	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 356	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 357	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 358	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 359	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 360	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 361	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 362	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 363	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 364	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 365	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 366	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 367	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 368	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 369	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 370	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 371	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 372	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 373	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 374	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 375	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 376	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 377	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 378	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 379	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 380	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 381	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 382	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 383	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 384	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 385	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 386	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 387	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 388	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 389	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 390	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 391	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 392	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 393	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 394	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 395	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 396	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 397	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 398	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 399	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 400	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 401	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 402	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 403	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 404	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF

Indirizzo 405	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 406	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 407	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 408	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 409	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 410	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 411	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 412	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 413	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 414	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 415	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 416	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 417	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 418	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 419	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 420	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 421	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 422	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 423	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 424	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 425	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 426	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 427	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 428	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 429	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 430	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 431	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 432	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 433	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 434	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 435	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 436	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 437	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 438	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 439	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 440	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 441	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 442	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 443	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 444	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 445	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 446	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 447	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 448	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 449	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 450	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 451	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 452	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 453	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 454	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 455	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF

Indirizzo 456	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 457	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 458	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 459	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 460	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 461	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 462	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 463	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 464	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 465	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 466	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 467	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 468	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 469	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 470	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 471	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 472	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 473	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 474	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 475	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 476	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 477	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 478	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 479	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 480	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 481	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 482	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 483	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 484	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 485	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 486	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 487	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 488	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 489	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 490	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 491	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 492	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 493	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 494	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 495	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 496	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 497	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 498	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 499	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 500	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 501	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 502	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 503	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 504	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 505	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 506	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF

Indirizzo 507	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 508	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 509	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 510	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 511	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 512	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON