


Mini Series

Constant Current LED Driver

LED恒流驱动器

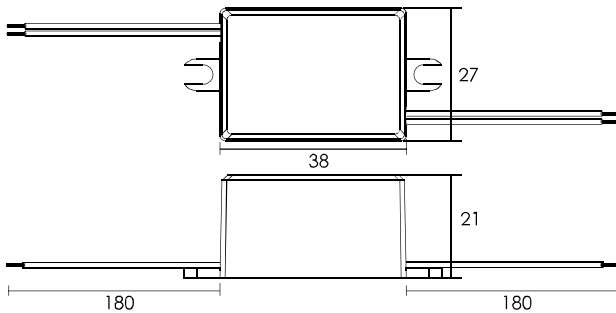

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
MINI350mA/4W	100-240	4	350	2-12	0.4C	78	<0.5	-20...+50	80	SELV	38x27x21	40
MINI500mA/4W	100-240	4	500	2-8	0.4C	76	<0.5	-20...+50	80	SELV	38x27x21	40
MINI700mA/4W	100-240	4	700	2-6	0.4C	73	<0.5	-20...+50	80	SELV	38x27x21	40

- Super compact design
- Universal AC input
- Primary and secondary sides come with leads
- Open circuit, short circuit, over load and overheating protection
- Simple installation
- IP65 design
- 超小体积紧凑设计
- 全电压输入规格AC100-240V
- 输入和输出端引线型
- 输出开路, 短路, 过载和超温保护
- 安装经济便捷
- IP65防护等级

