


Mini Series

Constant Voltage LED Driver

Features:

- Super compact design
- Analogue flicker-free
- Input and output terminal blocks on the same side
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II
- Driver for built-in use

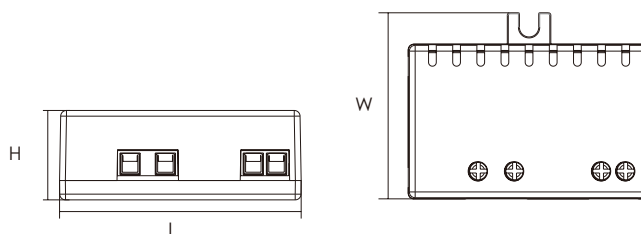

Parameters:

Model No.	Input voltage (V)	Max. output (W)	Output voltage (V)	Output current (A)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temperature t_a (°C)	Max. casing temperature t_c (°C)	Isolation	Dimensions LxWxH (mm)	Weight (g)
MINI-6-12	220-240	6	12	0-0.5	0.55C	79	<0.3	-20...+50	80	SELV	50x38.5x18.5	30
MINI-6-24	220-240	6	24	0-0.25	0.55C	81	<0.3	-20...+50	80	SELV	50x38.5x18.5	30



CB CE