


Q3 Series

Constant Voltage LED Driver

Features:

- Independent design
- Analogue flicker-free
- Universal AC input
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

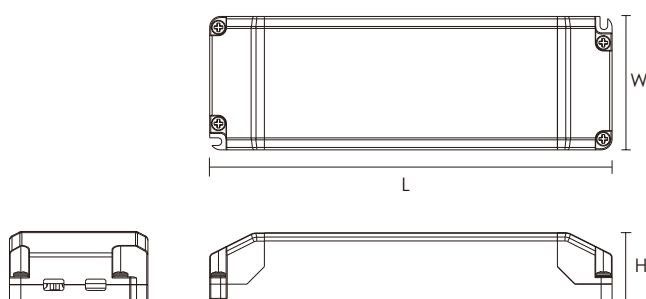

Parameters:

Model No.	Input voltage (V)	Max. output (W)	Output voltage (V)	Output current (A)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temperature t_a (°C)	Max. casing temperature t_c (°C)	Isolation	Dimensions LxWxH (mm)	Weight (g)
Q3-12V-100W	100-240	100	12	0-8.3	0.95	92	<0.5	-20...+45	85	SELV	184x61x32	350
Q3-24V-100W	100-240	100	24	0-4.16	0.95	90	<0.5	-20...+45	85	SELV	184x61x32	350

