


V2 Series

TRIAC Dimming LED Driver

Features:

- Independent design
- Dimmable constant voltage driver
- Analogue flicker-free
- Dimming with leading edge or trailing edge dimmer
- Smooth dimming compatible with most dimmer
- Dimming range 1...100%
- Primary and secondary sides come with leads
- Differential mode 4kV and common mode 6kV surge immunity
- Protections: opencircuit, shortcircuit, overload, over temperature
- SELV equivalent
- Protection class I
- IP67 design

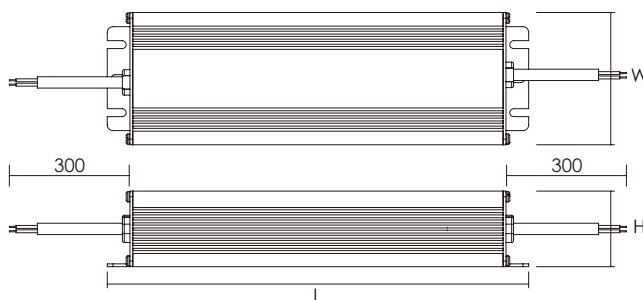

Parameters:

Model No.	Input voltage	Max. output	Output current	Output voltage	Power factor	Efficiency full load	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
	(V)	(W)	(A)	(V)	(λ)	(%)	t _a (°C)	t _c (°C)		(mm)	(g)
V2-100-12T (V2.0)	220-240	100	2.7-8.3	12	0.95	89	-20...+50	80	SELV	191x70x40	980
V2-100-24T (V2.0)	220-240	100	1.4-4.2	24	0.95	91	-20...+50	80	SELV	191x70x40	980
V2-200-12T (V2.0)	220-240	200	5.5-16.7	12	0.95	90	-20...+50	80	SELV	249x72x40	1240
V2-200-24T (V2.0)	220-240	200	2.7-8.3	24	0.95	91	-20...+50	80	SELV	249x72x40	1240