

V9 Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Super compact design
- Best value for money if application with narrow output voltage range is acceptable.
- Driver is suitable for built-in or independent installation
- Push-in wire terminal for easy install of input cable
- Suitable for protection class I and II luminaires
- High power factor
- Low ripple current, flicker-free
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

- 紧凑型设计
- 窄电压输出范围，高性价比
- 独立式驱动
- 输入按压式接线端子，安装便捷可靠
- 适用I类和II类灯具
- 高功率因素设计
- 低纹波电流，无频闪
- 输出开路、短路，过载和过温保护
- 符合安全特低电压标准
- 保护等级II

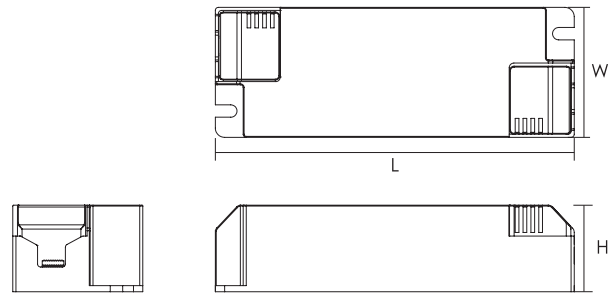

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
V9-25-600	220-240	25	600	30-42	0.95	<25	85	<0.5	-20...+50	80	SELV	116x41x25	80
V9-30-700	220-240	30	700	30-42	0.95	<15	85	<0.5	-20...+50	80	SELV	116x41x25	100
V9-34-800	220-240	34	800	30-42	0.95	<15	86	<0.5	-20...+50	80	SELV	116x41x25	100
V9-36-850	220-240	36	850	30-42	0.95	<15	88	<0.5	-20...+45	80	SELV	116x41x25	100
V9-38-900	220-240	38	900	30-42	0.95	<15	88	<0.5	-20...+45	85	SELV	116x41x25	100
V9-40-950	220-240	40	950	30-42	0.95	<15	88	<0.5	-20...+45	85	SELV	116x41x25	100
V9-40-1050	220-240	40	1050	28-39	0.95	<15	88	<0.5	-20...+45	85	SELV	116x41x25	100
V9-45-1050	220-240	45	1050	30-42	0.95	<15	88	<0.5	-20...+45	85	SELV	116x41x25	110
V9-50-1200	220-240	50	1200	30-42	0.95	<15	88	<0.5	-20...+45	85	SELV	146x43x28	170
V9-60-1400	220-240	60	1400	30-42	0.95	<15	89	<0.5	-20...+45	85	SELV	146x43x28	170