

Features



- Independent super slim design
- Non-dimmable constant voltage LED driver
- Flicker-free
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Differential mode 2kV and common mode 2kV surge immunity
- Suitable for protection class I&II luminaires
- Protection class II



Selection Guide

Model No.	Nominal Voltage (V)	Nominal Current (A)	Power Factor (λ)	THD Full load (%)	Max. Output (W)	Output Current (A)	Output Voltage (V)	No Load Voltage (V)	Efficiency Full Load (%)
UT-75-12	220-240	0.46	0.95C	15	75	0-6.25	12	12.6	88
UT-75-24	220-240	0.46	0.95C	15	75	0-3.12	24	25.2	89

Input Parameters

Parameter	Condition	Min.	Typ.	Max.																				
Input Voltage Range	AC Input	198VAC	--	264VAC																				
	DC Input	176Vdc	--	280Vdc																				
Rated Input Frequency	AC Input	--	50/60Hz	--																				
No-load Power Consumption		--	--	0.3W																				
Standby Power Consumption		--	--	N/A																				
Inrush Current	Cold Start@230V	55A/200us																						
Max.units Per Circuit Breaker																								
<table><tr><td>Circuit Breaker</td><td colspan="4">Circuit Breaker Current</td></tr><tr><td>Typ.</td><td>10A</td><td>13A</td><td>16A</td><td>20A</td></tr><tr><td>B</td><td>5</td><td>6</td><td>8</td><td>10</td></tr><tr><td>C</td><td>10</td><td>13</td><td>16</td><td>20</td></tr></table>					Circuit Breaker	Circuit Breaker Current				Typ.	10A	13A	16A	20A	B	5	6	8	10	C	10	13	16	20
Circuit Breaker	Circuit Breaker Current																							
Typ.	10A	13A	16A	20A																				
B	5	6	8	10																				
C	10	13	16	20																				

Output Parameters

Parameter	Condition	Min.	Typ.	Max.
Output Accuracy	Full Load@230V	--	±5%	--
Ripple & Noise	Low Frequency < 120Hz, Full Load@230VAC (UT-75-12)	--	--	1800mV
Ripple & Noise	Low Frequency < 120Hz, Full Load@230VAC (UT-75-24)	--	--	2400mV
Pst LM		--	--	1
SVM		--	--	0.4
Galvanic Isolation	SELV			
Short-Circuit Protection (SCP)	Auto-Recover If Fault Is Removed			
Over-Temperature Protection (OTP)	Auto-Recover If Fault Is Removed			
Over-Voltage Protection (OVP)	N/A			
Over-Current Protection (OCP)	Auto-Recover If Fault Is Removed			

General Parameters

Parameter	Condition	Value
Ambient Temperature Range t_a	1) 200-240Vac, Full load, $T_a = -20^{\circ}\text{C}/25^{\circ}\text{C}/40^{\circ}\text{C}$ 2) 45°C 80% load	-20...+45°C
Maximum Case Temperature t_c	Measured on t_c point indicated of the product label	90°C

Max.Case Temp.In Fault Condition		110°C
Storage Temperature Range		-20...+70°C
Relative Humidity	Non Condensing	5...85%
Withstand Voltage	I/P-O/P	3.75kVAC, I leakage<5mA, 60s
Surge Transient Protection	L-N, L/N-PE	2kV, 2kV
Environmental Rating		Indoor
IP Rating		IP20
Mains Switching Cycles		> 100,000
Expected Lifetime	At t _{cmax} , 0.2%/1000h failure rate 1) 200-240Vac, Full load, Ta = -20°C/25°C/40°C 2) 45°C 80% load	50,000h

Physical Parameters

Housing Material	PC
Type of connection	Screw terminal
Dimensions (LxWxH)	175x58x16mm
Mounting hole spacing	137x52mm
Weight (UT-75-12)	247g±5g
Weight (UT-75-24)	247g±5g

Standards


Safety Standards	EN 61347-1, EN 61347-2-13, EN60335
Performance	EN 62384
EMC Standards	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547

*ALL parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.


Product Characteristic Curve

UT-75-XX


Power Factor vs Load

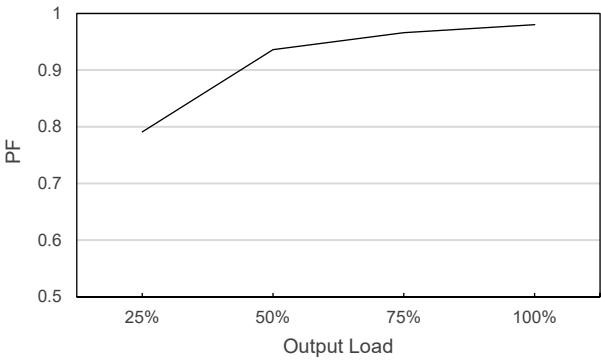


Total Harmonic Distortion vs Load

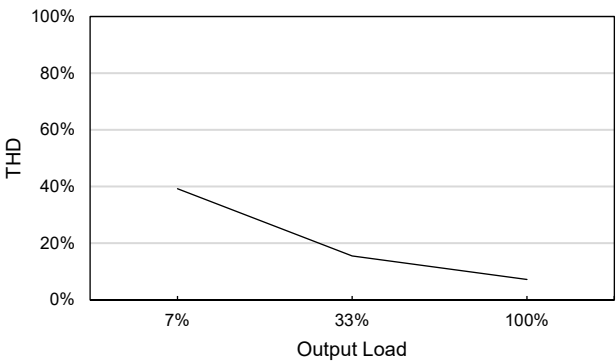


UT-75-12 Efficiency vs Load

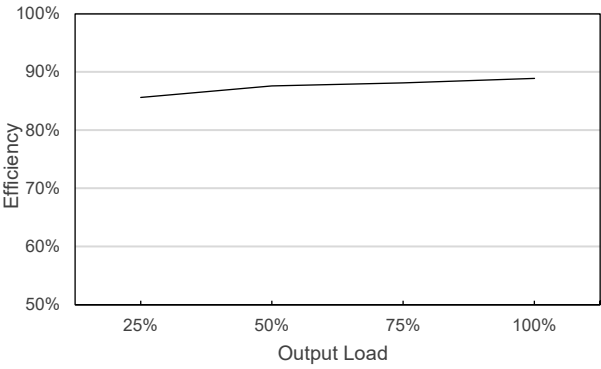

UT-75-24 Efficiency vs Load

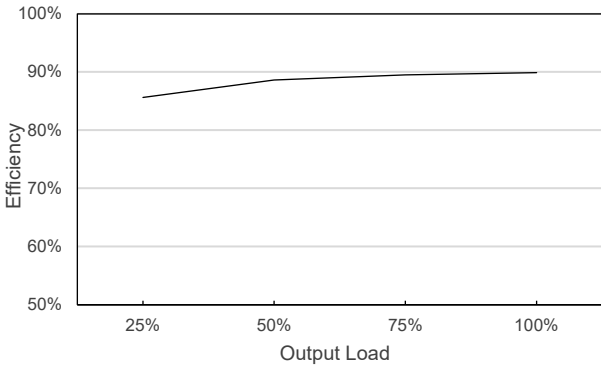

Life Time vs Case Temperature

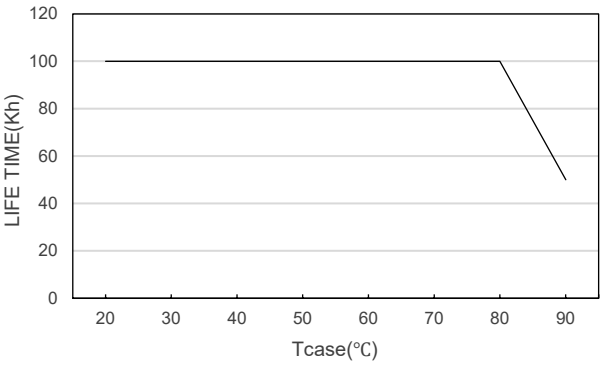


LED Driver



UL75-XX

Dimension Drawing(mm)

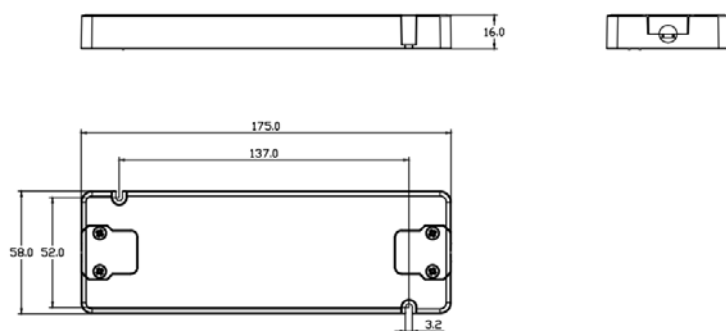

Wiring Diagram



PRI

Cable cross-section: 0.75-1.5mm²

Stripping: 6mm

SEC

Cable cross-section: 0.5-1.5mm²

Stripping: 6mm

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.