


Triac Dimming LED Driver

LT-150-xxT



Appearance of Size

Dimension Drawing(mm)

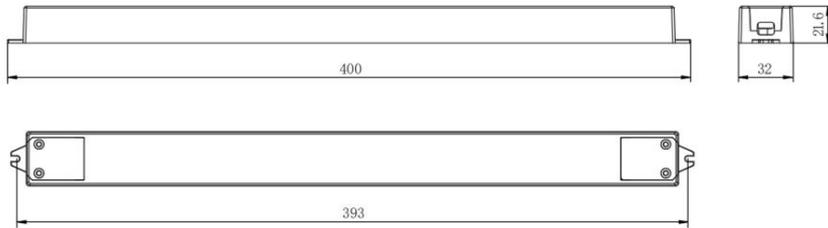

PRI

Cable cross-section: 0.75-1.5mm²


Stripping: 11mm

SEC

Cable cross-section: 0.5-1.5mm²

Stripping: 11mm

Wiring Diagram

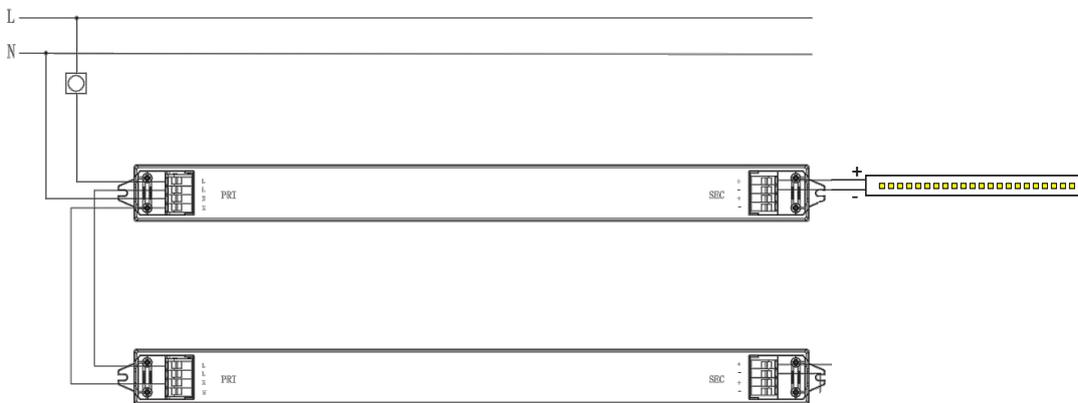

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.