



Your Reliable Power Partner



Building Automation Solutions *Product Range Overview*



Company Profile


Founded in 1982, MEAN WELL is one of the few professional manufacturers worldwide dedicated primarily to standard power supply products. With a strong global manufacturing footprint, MEAN WELL operates five production bases located in New Taipei City, Taiwan; Guangzhou and Suzhou, China; Bengaluru, India; and Kansas City, USA. MEAN WELL's global headquarters is situated in the New Taipei Industrial Park, Taiwan, and it maintains subsidiaries and representative offices in Guangzhou, Shenzhen, Suzhou, and Hong Kong; California, USA; the Netherlands in Europe; Turkey in Asia; as well as Singapore, Malaysia, and India—enabling comprehensive global sales, service, and support coverage. The product lines include AC/DC switching power supplies, DC/DC converters, waterproof LED drivers, adaptors, DC/AC inverters and battery chargers. We have over 10,000 standard models widely used in medical, automation, communication, LED lighting, moving sign, and office automation applications.

With more than 40 years of experience in R&D and production of standard power supplies, MEAN WELL has 12 product categories covering over 10,000 models, to provide "One Stop Shopping" power solutions. Every product in MEAN WELL is the result of rigid procedures governing design, design verification test (DVT), design quality test (DQT), component selection, pilot-run production, and mass production.

With more than 260 distributors globally, the MEAN WELL products are distributed to over 80 countries worldwide. The small size orders can expect delivery within 24 hours without MOQ requirement. If you are looking for switching power supply with high reliability, good quality, reasonable price and full series products, MEAN WELL, a total solution provider which can satisfy your various demands, is definitely your first choice!



Product Tree

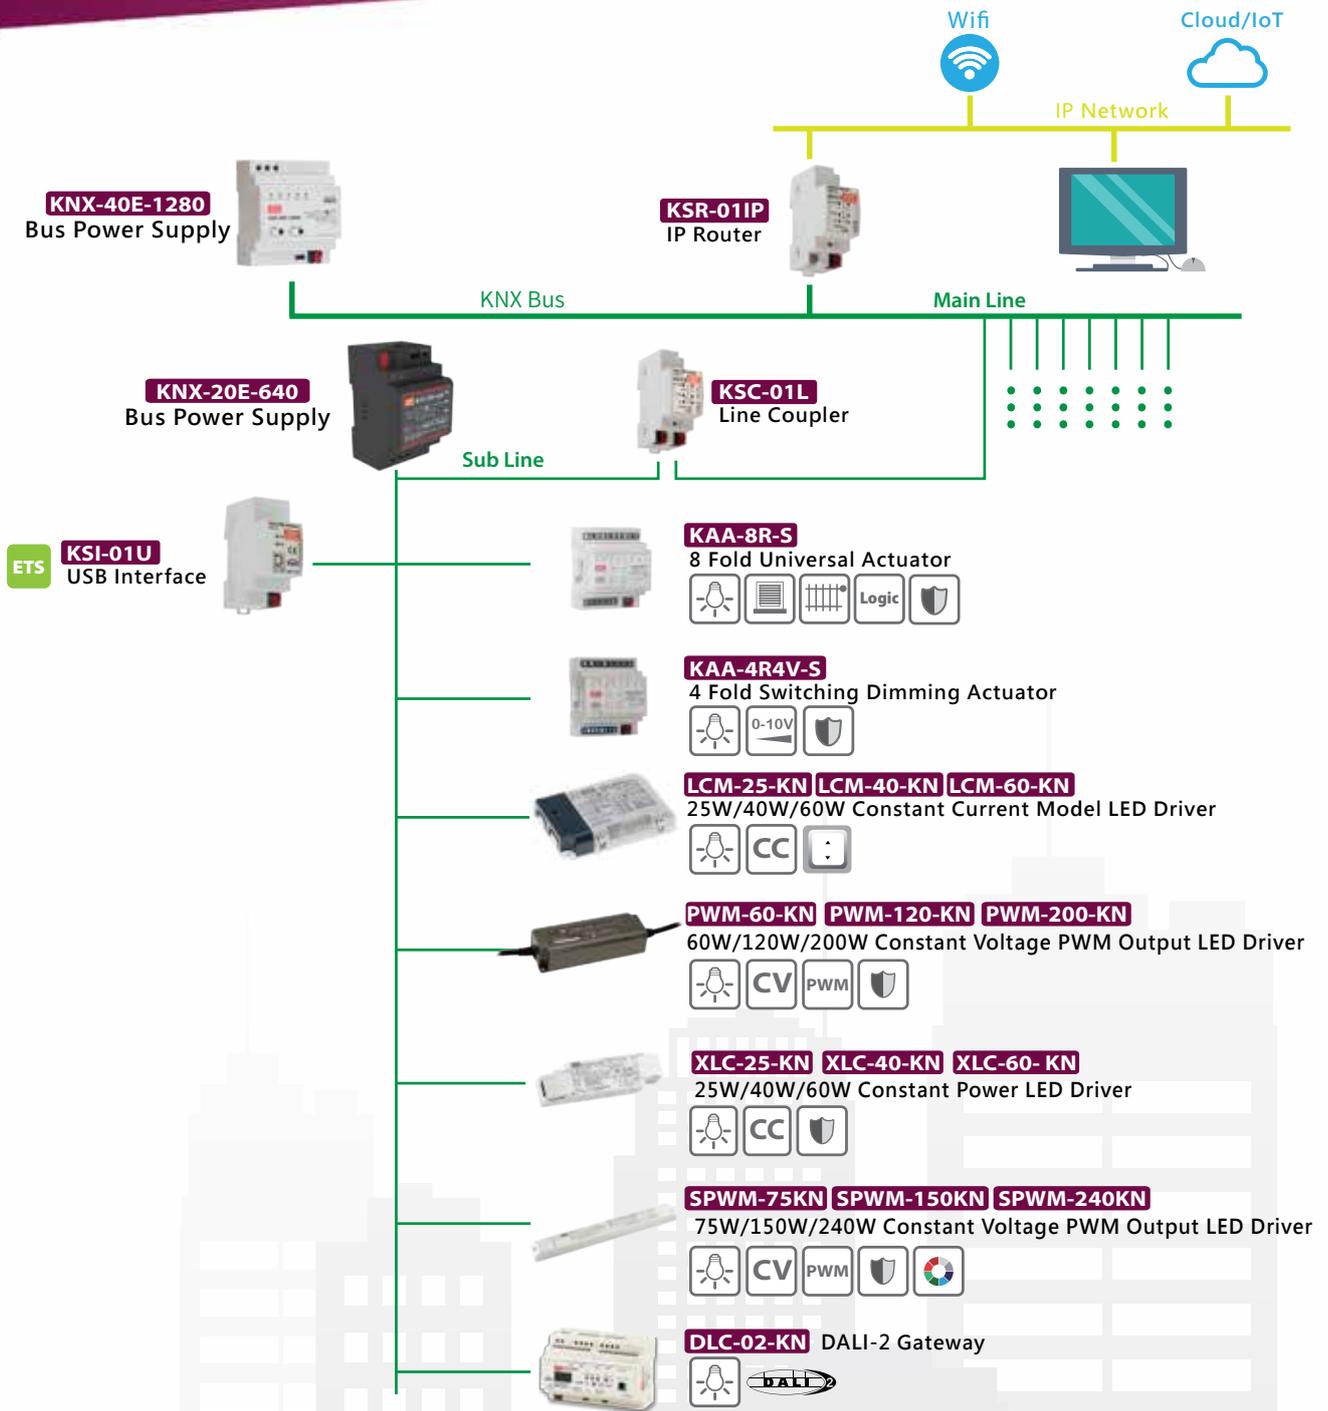

- | | | | | | | | | | | | |
|--|------------------|--|-----------------------|--|-------------------------------|--|-------------------------------|--|--------------------------|--|-------------|
| | Lighting Control | | Blind/Shutter Control | | Logic Function | | Constant Current Driving Mode | | DC 0-10V Dimming Control | | Data Secure |
| | Heating Control | | Push Button Interface | | Constant Voltage Driving Mode | | PWM Style Output Mode | | RGBW Dimming Control | | |



Fast and Multi Language Support for any question of KNX product within 24 hours . For the details please check the last page.



LCM Series

25~60W KNX Constant Current LED Driver



LCM-KN series is an AC/DC constant current mode output LED driver series featuring the multiple levels selectable by dip switch and the KNX interface to avoid using the complicated KNX-DALI gateway. LCM-KN operates from 180~295VAC and offers different current levels ranging between 350mA and 1400mA.

Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -30°C~+90°C case temperature under free air convection. In addition, LCM-KN series is equipped with push dimming and synchronization so as to provide the optimal design flexibility for LED lighting system.



▲ LCM-25KN
L105x W68x H23mm



▲ LCM-40/60KN
L123.5x W81.5x H23mm

Features

- KNX protocol
- Constant current mode output with multiple levels selectable by dip switch
- Support emergency light (EL)
- Constant lumen output
- Intergrated KNX push button interface
- Synchronization up to 10 units
- Minimum dimming level 0.5%
- Functions: manual dim, operation hours, log/linear curve selection
- 3 years warranty



LCM-25/40/60KN

Model Name	Output	Current Tolerance	Current Ripple	Efficiency
LCM-25KN	350mA~1050mA, 6~54V	±5%	5%(max)	85%
LCM-40KN	350mA~1050mA, 2~100V	±5%	5%(max)	90%
LCM-60KN	500mA~1400mA, 2~90V	±5%	5%(max)	91%

XLC-KN Series

25W~60W Constant Power LED Driver



The XLC-KN series is designed as an AC/DC constant power LED driver solution, available in 25W, 40W, and 60W power ratings. Equipped with a KNX interface featuring data secure capabilities, these drivers integrate seamlessly with KNX systems for precise digital lighting control. With an input voltage range of 100–305VAC and adjustable current settings from 350mA to 1700mA (varying by model).

Thanks to its high efficiency of up to 90%, the entire series is able to operate for -25°C~+90°C case temperature under free air convection, including standalone push-button dimming, group control for switching and scenes, cumulative runtime monitoring, energy feedback, constant illuminance output, scheduled dimming, power temperature detection, and characteristic curve calibration. These advanced capabilities make it the ideal choice for LED lighting systems in modern smart buildings.



(Independent type)



▲XLC-25/40-KN-S
L147x W40x H32mm



▲XLC-60-KN-S
L176x W45x H32mm

(Built-in type)



▲XLC-25/40-KN
L107x W40x H32mm



▲XLC-60-KN
L136x W45x H32mm

Features

- KNX protocol, support KNX data secure
- Constant power mode output with multiple stage selectable by ETS database
- Plastic housing with class II and PFC design
- Flicker free, complying with CE ErP directive
- Standby power consumption <0.5W
- Meet emergency lighting (EL) function application
- Minimum dimming level 0.5%
- Function: operation hours, power consumption feedback, log/linear curve selection...etc
- 5 years warranty



XLC-25/40/60-KN

Model Name	Output	Total Harmonic Distortion (@230VAC)	Inrush Current (Cold start)	Efficiency
XLC-25-KN	300mA~1050mA, 9~54V	THD<10% (@Load≥50%)	10A	88%
XLC-40-KN	600mA~1400mA, 9~54V	THD<10% (@Load≥50%)	10A	88%
XLC-60-KN	900mA~1700mA, 9~54V	THD<20% (@Load≥60%)	15A	90%

PWM Series

60~200W KNX Constant Voltage LED Driver



PWM-KN series is an AC/DC LED driver featuring the constant voltage mode with PWM style output controlled directly via KNX. The entire series is able to operate for -40°C~90 °C case temperature with its minimal dimming level low to 0.01% and user changeable output frequency up to 4KHz compliant IEEE 1789-2015 flickering requirement.



▲ **PWM-60-KN**
L150x W53x H35mm

▲ **PWM-120-KN**
L191x W63x H37.5mm

▲ **PWM-200-KN**
L195x W68x H39.5mm

Features

- KNX protocol, support KNX data secure
- Constant Voltage PWM style output with user changeable frequency up to 4KHz
- Plastic housing with class II design
- Built-in active PFC function
- Standby power consumption <0.5W
- Typical lifetime >50000 hours
- Support KNX data secure (PWM-200KN only)
- Minimum dimming level 0.01%
- 5 years warranty



■ PWM-60/120/200-KN

Model Name	Output	KNX Data Secure	Efficiency
PWM-60-12□	12V, 0~5A		86%
PWM-60-24□	24V, 0~2.5A		89%
PWM-120-12□	12V, 0~10A		88.5%
PWM-120-24□	24V, 0~5A		90%
PWM-200-12□	12V, 0~15A	V	92%
PWM-200-24□	24V, 0~8.3A	V	93%
PWM-200-36□	36V, 0~5.55A	V	94%
PWM-200-48□	48V, 0~4.17A	V	94%

□=KN/KNBST KN: KNX control technology ; KNBST: KNX control technology with BST14 connector

SPWM-KN Series

75W~240W Constant Voltage PWM Output LED Driver



SPWM-KN series is a AC/DC LED driver featuring the constant voltage mode with PWM style output. Supports multiple output modes including dimming, color temperature, RGBW, which is able to maintain the color temperature and the brightness homogeneity when driving all kinds of LED strips. Achieves multi-functional operation in one unit and complements the existing PWM series. So as to provide the optimal design flexibility for LED lighting system.

NEW

▲SPWM-75-KN
L290x W38x H28.5mm

▲SPWM-150-KN
L340x W38x H28.5mm

▲SPWM-240-KN
L380x W38x H28.5mm

Features

- KNX protocol, support KNX data secure
- Supports multiple output modes including dimming, color temperature, RGBW
- Constant voltage PWM style output with 1 to 4 channels
- Plastic housing with class II and PFC design
- Flicker free, complying with CE ErP directive
- Standby power consumption <0.5W
- Cooling by free air convection
- Minimum dimming level 0.1%
- 5 years warranty



■ SPWM-75/150/240-KN


Model Name	Output	KNX Data Secure	Efficiency
SPWM-75-12KN	12V, 6.3A	V	89%
SPWM-75-24KN	24V, 3.2A	V	90%
SPWM-150-12KN	12V, 12.5A	V	92%
SPWM-150-24KN	24V, 6.3A	V	93%
SPWM-240-24KN	24V, 10A	V	93%
SPWM-240-48KN	48V, 5A	V	94%

KAA Series

KNX Actuator



KNX Universal Actuator

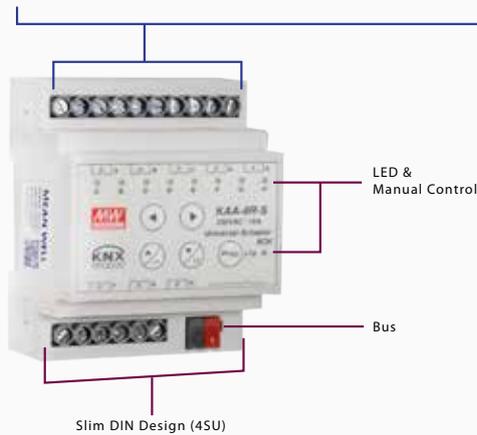


KAA-8R-S
W72x H90x D57mm

- 8 channel actuator in a compact size
- Suitable for various and mixed applications
- For AX, C-load, capacitive & inductive of loads
- **Capacitive load 220µF**
- Manual control via panel push button
- KNX data secure version available
- 3 years warranty

Model Name	Channel	Rating Current / Channel
KAA-8R-S	8-Fold	16A
KAA-8R-10S	8-Fold	10A

KNX Dimming Actuator

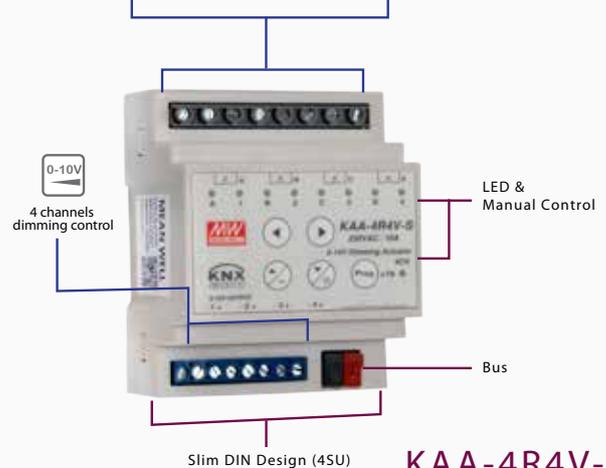


KAA-4R4V-S
W72x H90x D57mm


- Dimming and switching LED driver and conventional electronic ballast
- **Capacitive load 220µF**
- Linear or logarithmic dimming curve programmable via ETS software
- Programmable various time and scene function
- KNX data secure version available
- 3 years warranty

Model Name	Channel	Rating Current / Channel
KAA-4R4V-S	4-Fold	16A
KAA-4R4V-10-S	4-Fold	10A


KAA-4R4V Wiring Examples

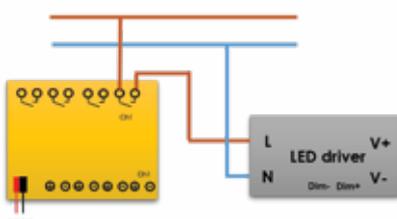

1. Non-dimmable Driver

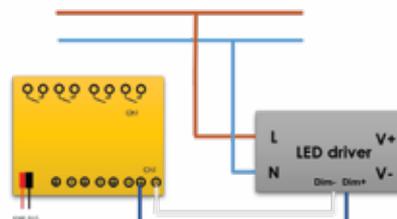

2. DC 0-10V Driver

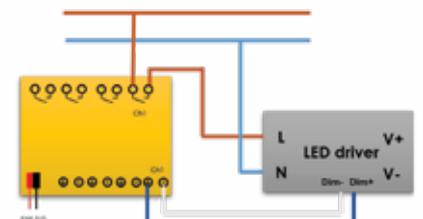

3. DC 1-10V Driver

KNX Series

640mA & 1280mA Bus Power Supply



640mA Bus Power Supply

KNX-20E-640 is a 640mA power supply with high efficiency and a small footprint of only 3SU (52.5 mm). The device has a KNX bus choke output and an additional output for ancillary power. LED indicators are used in normal operation, overload conditions and RESET operation. It is perfectly suitable to power up any products labeled with the KNX trademark.

KNX-20E-640 is engineered to be a reliable and safe solution for KNX bus environment.



W52.5x H90xD54.5mm

1280mA Bus Power Supply

KNX-40E-1280 is a 1280mA power supply with high efficiency and a small footprint of only 4SU(72mm). The device has a KNX bus choke output and an additional output for ancillary power. LED indicators are used in normal operation, overload conditions and RESET operation. It is perfectly suitable to power up any products labeled with the KNX trademark. KNX-40E-1280 is engineered to be a reliable and safe solution for KNX bus environment.



W72x H90x D57mm

Features

- EIB / KNX power supply with integrated choke
- Compact size with 3SU/4SU width
- Safety extra low voltage (SELV)
- 180~264VAC input
- No load power consumption <0.5W
- Protections:
Short circuit / Overload(short-circuit-proof) / Over voltage

- Cooling by free air convection
- Isolation class I
- LED indicator for normal operation, bus reset and bus overload
- Installed on DIN rail TS-35/7.5 or 15
- Over voltage category III
- Wide operating temperature: -30~+70°C
- 3 years warranty

Model Name	V _{out1} (with choke)	V _{out2} (without choke)	I _{out} (I ₁ +I ₂)
KNX-20E-640	Bus, 30VDC	30VDC	640mA

□ : E, U ; E=230VAC Input(Standard), U=115VAC Input(Optional)

Model Name	V _{out1} (with choke)	V _{out2} (without choke)	I _{out} (I ₁ +I ₂)
KNX-40E-1280□	Bus, 30VDC	30VDC	1280mA

□ : Blank, D ; Blank= Basic function, D=Diagnostic function

Gateway System Component



KNX to DALI Gateway




DLC-02-KN
L144x W90x H58.3mm


Features

- KNX to DALI-2 gateway
- Two independent DALI Bus channels with built-in bus power supply (up to 250mA per bus)
- Connect up to 2x64 DALI ECGs/Drivers
- LCD display, LED indicators and buttons for local operation
- Built-in 4x250/5A relay
- Easy installation and configuration via ETS

How to use DLC-02

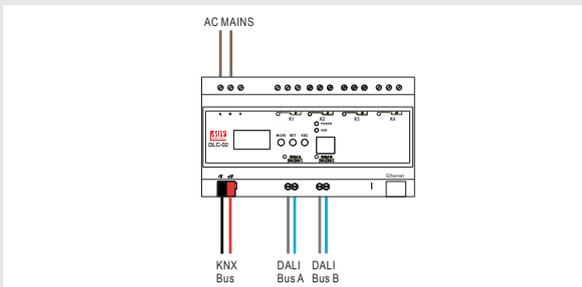

KNX gateway

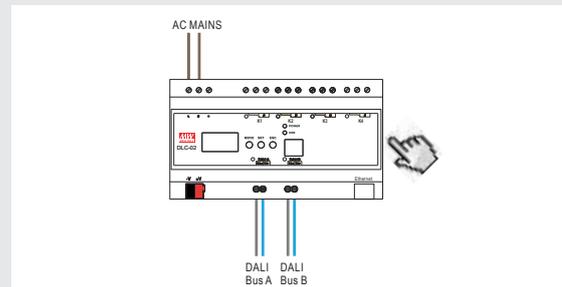

Local setting

USB Interface



KSI-01U

W36x H90x D71mm

Features

- No additional power supply required
- KNX commissioning, addressing and parameters settings
- Long messages support up to 220 byte APDU
- 3 years warranty

IP Router



**KSR-01IP
KSR-02IP**

W36x H90x D71mm

Features

- KNX IP/TP routing
- Built-in web server
- KNX IP secure (optional)
- 3 years warranty

Line Coupler



**KSC-01L
KSC-02L**


W36x H90x D71mm

Features

- KNX TP Line coupler/Repeater
- Telegram filtering function
- Long messages support up to 240 byte APDU
- 3 years warranty

HDR Series

15~150W Ultra Slim Step Shape Power Supply



Features

- Ultra slim design with 15U~6SU width
- Universal input 85~264VAC(277VAC operational)
- No load power consumption<0.3W
- Isolation class **II**
- Pass LPS (Limited power source)
- DC output voltage adjustable
- Protections : Short circuit / Overload / Over voltage
- Cooling by free air convection (working temperature:-30~+70°C)
- DIN rail TS-35/7.5 or 15 mountable
- Over voltage category **III**
- LED indicator for power on
- 3 years warranty



▲HDR-15
W17.5x H90x D54.5mm



▲HDR-30
W35x H90x D54.5mm



▲HDR-60
W52.5x H90x D54.5mm



▲HDR-100
W70x H90x D54.5mm



▲HDR-150
W105x H90x D54.5mm

HDR-15

Model Name	Output	Tol.	R&N	Effi.
HDR-15-5	5V, 0~2.40A	±2%	80mV	80%
HDR-15-12	12V, 0~1.25A	±1%	120mV	85%
HDR-15-15	15V, 0~1.00A	±1%	120mV	85.5%
HDR-15-24	24V, 0~0.63A	±1%	150mV	86%
HDR-15-48	48V, 0~0.32A	±1%	240mV	87%

■ HDR-30

Model Name	Output	Tol.	R&N	Effi.
HDR-30-5	5V, 0~3.0A	±2%	80mV	82%
HDR-30-12	12V, 0~2.0A	±1%	120mV	88%
HDR-30-15	15V, 0~2.0A	±1%	120mV	89%
HDR-30-24	24V, 0~1.5A	±1%	150mV	89%
HDR-30-48	48V, 0~0.75A	±1%	240mV	90%

■ HDR-60

Model Name	Output	Tol.	R&N	Effi.
HDR-60-5	5V, 0~6.5A	±2%	80mV	85%
HDR-60-12	12V, 0~4.5A	±1%	120mV	88%
HDR-60-15	15V, 0~2.0A	±1%	120mV	89%
HDR-60-24	24V, 0~1.5A	±1%	150mV	90%
HDR-60-48	48V, 0~0.75A	±1%	240mV	91%

HDR-100

Model Name	Output	Tol.	R&N	Effi.
HDR-100-12	12V, 0~7.1A	±2%	120mV	88%
HDR-100-12N	12V, 0~7.5A	±2%	120mV	88%
HDR-100-15	15V, 0~6.13A	±1%	120mV	89%
HDR-100-15N	15V, 0~6.5A	±1%	120mV	89%
HDR-100-24	24V, 0~3.83A	±1%	150mV	90%
HDR-100-24N	24V, 0~4.2A	±1%	150mV	90%
HDR-100-48	48V, 0~1.92A	±1%	240mV	90%
HDR-100-48N	48V, 0~2.1A	±1%	240mV	90%

HDR-100: 92W max., pass LPS

HDR-100-xxN: 100W max., non-LPS with a wide output adjustable range

■ HDR-150

Model Name	Output	Tol.	R&N	Effi.
HDR-150-12	12V, 0~11.3A	±2%	100mV	89%
HDR-150-15	15V, 0~9.5A	±1%	120mV	89.5%
HDR-150-24	24V, 0~6.25A	±1%	150mV	90.5%
HDR-150-48	48V, 0~3.2A	±1%	200mV	90.5%

Taiwan (Headquarters)
MEAN WELL ENTERPRISES CO., LTD.
Tel +886-2-2299-6100(rep.)
e-mail info@meanwell.com
Web www.meanwell.com

U.S.A. (California)
MEAN WELL USA, INC.
Tel +1-833-635-7201
e-mail info@meanwellusa.com
Web www.meanwellusa.com

Europe (The Netherlands)
MEAN WELL EUROPE N.V.
Tel +31-20-758-6000
e-mail info@meanwell.eu
Web www.meanwell.eu

China
MEAN WELL (GUANGZHOU) ELECTRONICS CO., LTD.
Tel +86-20-3773-7100 / 400-800-3608(sales)
+86-10-5200-1817(Beijing Office)
+86-755-2359-1630(Shengzhen Office)

SUZHOU MEAN WELL TECHNOLOGY CO., LTD.
Tel +86-512-6508-8600
e-mail info@meanwell.cc
Web www.meanwell.cc

India (Bengaluru)
MEAN WELL INDIA ELECTRONICS PRIVATE LIMITED
Tel +91-9686448906
e-mail benaka.v@meanwellindia.com
Web www.meanwellindia.com

EuroTek®
DAI TECNICI, PER I TECNICI

Viale dell'Industria 46, 21052 Busto Arsizio (VA) Italy
TEL: +39.0331.679930 | +39.0331.677196
FAX: +39.0331.679940
E-mail: marketing@eurotek.it



info@meanwell.com
www.meanwell.com
building.meanwell.com



For service, repairs and telephone support, you can talk to one of our in-house employees. This ensures that you receive specialist advice. You won't simply end up in a call center!

中文 任何KNX 產品疑問24小時內快速回覆
简体中文 任何KNX 产品疑问24小时内快速回复

GERMAN Schneller Support für jegliche KNX-Produkt Fragen innerhalb von 24 Stunden.

ENGLISH Fast support for any question of KNX Product within 24hours.

FRENCH Assistance rapide pour toute question relative aux produits KNX en 24 heures maximum.

SPANISH Soporte rápido para cualquier pregunta de los productos KNX en 24 horas.

DUTCH Wij bieden snelle ondersteuning voor al uw KNX-productvragen binnen 24 uur.

ITALIAN Supporto rapido per qualsiasi richiesta sui nostri prodotti KNX entro 24 ore.

POLISH Szybkie wsparcie dla dowolnego pytania dotyczącego produktu KNX w ci ągu 24 godzin.



MEAN WELL
Website