

Features



- Independent super slim design
- Non-dimmable constant voltage LED driver
- Flicker-free
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- DC input compatible (176-280VDC)
- Differential mode 2kV and common mode 2kV surge immunity
- Suitable for protection class I&II luminaires
- Protection class II



Selection Guide

Model No.	Nominal Voltage (V)	Nominal Current (A)	Power Factor (λ)	THD Full load (%)	Max. Output (W)	Output Current (A)	Output Voltage (V)	No Load Voltage (V)	Efficiency Full Load (%)
UT-100-12	220-240	0.55	0.95	10	100	0-8.33	12	12.6	91
UT-100-24	220-240	0.55	0.95	10	100	0-4.17	24	25.2	92
UT-100-48	220-240	0.55	0.95	10	100	0-2.08	48	50.4	92

Input Parameters

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range	AC Input	198VAC	--	264VAC
	DC Input	176VDC	--	280VDC
Rated Input Frequency	AC Input	--	50/60Hz	--
No-load Power Consumption		--	--	0.5W
Standby Power Consumption		--	--	N/A
Inrush Current	Cold Start@230V	50A/200us		
Max.units Per Circuit Breaker				
Circuit Breaker		Circuit Breaker Current		
Typ.	10A	13A	16A	20A
B	5	6	8	10
C	11	14	17	22

Output Parameters

Parameter	Condition	Min.	Typ.	Max.
Output Accuracy	Full Load@230V	--	±5%	--
Ripple & Noise	Low Frequency < 120Hz, Full Load@230VAC	--	--	5%
Pst LM		--	--	1
SVM		--	--	0.4
Galvanic Isolation	SELV			
Short-Circuit Protection (SCP)	Auto-Recover If Fault Is Removed			
Over-Temperature Protection (OTP)	Auto-Recover If Fault Is Removed			
Over-Voltage Protection (OVP)	N/A			
Over-Current Protection (OCP)	Auto-Recover If Fault Is Removed			

General Parameters

Parameter	Condition	Value
Ambient Temperature Range t_a		-20...+45°C
Maximum Case Temperature t_c	Measured on t_c point indicated of the product label	90°C
Max.Case Temp.In Fault Condition		110°C
Storage Temperature Range		-20...+70°C
Relative Humidity	Non Condensing	5...85%
Withstand Voltage	I/P-O/P	3.75kVAC, I leakage<5mA, 60s
Surge Transient Protection	L-N, L/N-PE	2kV, 2kV
Environmental Rating		Indoor
IP Rating		IP20
Mains Switching Cycles		> 100,000
Expected Lifetime	$T_{cmax}=90^{\circ}\text{C}$, 0.2%/1000h failure rate	50,000h

Physical Parameters


Housing Material	PC
Type of connection	Screw terminal
Dimensions (LxWxH)	205x58x18mm
Mounting hole spacing	167x52mm
Weight	TBD

Standards

Safety Standards	EN 61347-1, EN 61347-2-13, EN60335
Performance	EN 62384
EMC Standards	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547


*ALL parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.

Product Characteristic Curve

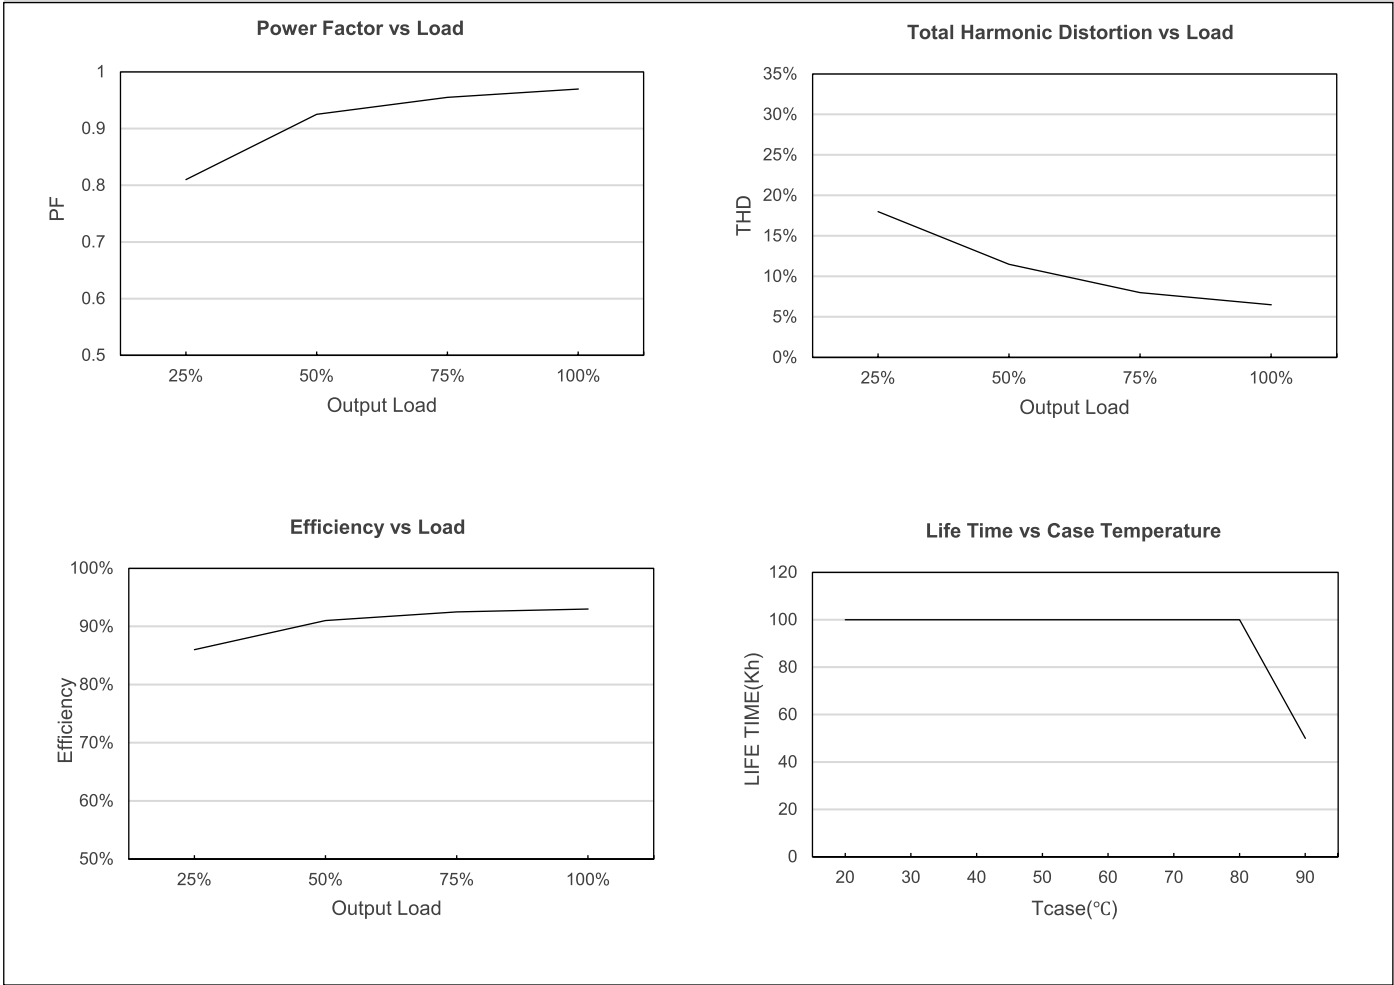


Appearance of Size

Dimension Drawing(mm)

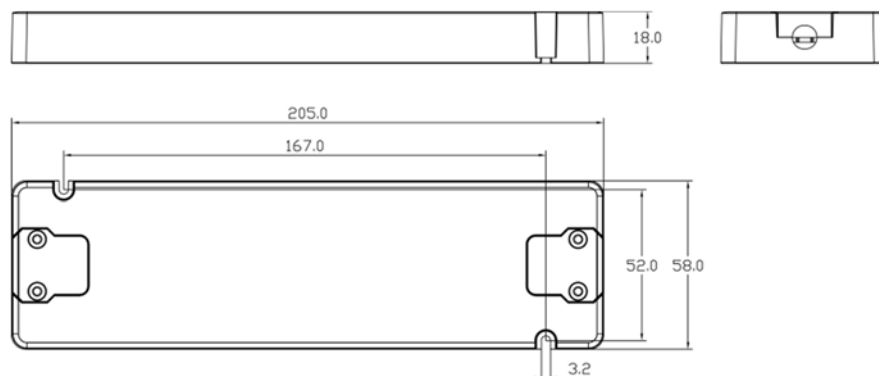

Wiring Diagram

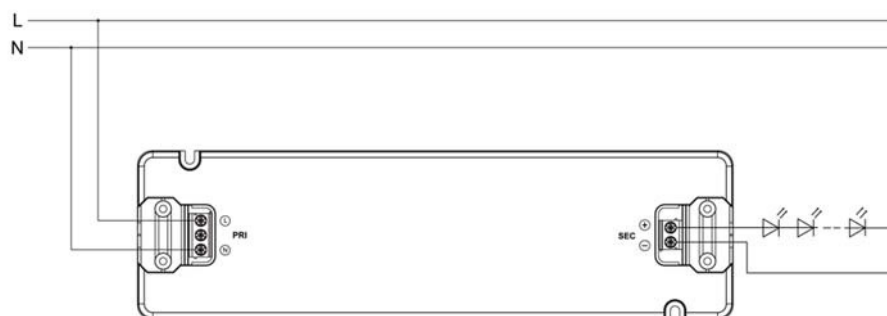

PRI

Cable cross-section: 0.75-1.5mm²

Stripping: 6mm

SEC

Cable cross-section: 0.5-1.5mm²

Stripping: 6mm

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.